


# System On Module iW-RainboW-G47M

## Kintex Ultrascale+ FPGA SOM

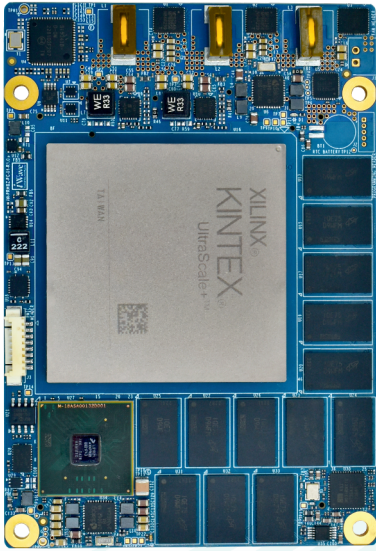

Kintex Ultrascale+ FPGA System On Module supports Kintex Ultrascale+ FPGA and ARM Cortex A7 processor. The SOM features FPGA with programmable logic cells up to 1842K and Power-efficient 32-bit Dual Arm Cortex-A7 core processor, running up to 1.2 GHz.

The SOM is compatible with KU19P Kintex Ultrascale+ FPGA and KU095 & KU115 Kintex Ultrascale FPGAs. The module is capable of high speed connectivity peripherals such as 100G Ethernet, PCIe, USB3.0, SATA3.1, Gigabit Ethernet and dual 64-bit DDR4 with ECC and 32-bit DDR4 with ECC.

### APPLICATIONS:

Data Centre Network Acceleration, Industrial IoT, Cloud Computing

## iW-RainboW-G47M


### HIGHLIGHTS

- Xilinx Kintex Ultrascale+ FPGA with B2104 package
- Dual 4GB FPGA-DDR4 with ECC (64bit + 8bit)
- 48 channels of GTY transceivers up to 32Gbps
- Two 240pin High-Speed Connectors with 172 user IOs
- Dual ARM Cortex-A7 core processor of 1.2GHz speed
- 2GB DDR4 for CPU with ECC (32bit+4bit)
- QorIQ Trust Architecture and Arm TrustZone
- 4 lanes of 6Gbps SERDES from CPU
- Industrial Grade Availability

### SPECIFICATIONS

<b>Kintex UltraScale+ FPGA</b>	<b>Quad Board to Board Connector interfaces</b>
Kintex Ultrascale+ with B2104 package	<b>From FPGA</b>
Upto 1,842K Logic Cells	GTY Transceiver x32 up to 32Gbps
Upto 1,080 DSP Slices	46 LVDS Pairs
<b>CPU</b>	80 SE FPGA IOs
Dual ARM Cortex-A7 core processor	<b>From CPU</b>
Operation frequency of 1.2GHz	SERDES x3 @6Gbps (PCIe, SATA, SGMII)
QorIQ Trust Architecture and Arm TrustZone	Gigabit Ethernet x 1
High-speed serial interfaces (SERDES) x4 @6Gbps	USB 2.0 OTG x 1
<b>Memory Interfaces</b>	USB 3.0 x1
<b>From FPGA</b>	I2C x 2
Dual 64-bit DDR4 with ECC	Debug UART
128MB QSPI flash	UART x 2
<b>From CPU</b>	JTAG
32bit DDR4 with ECC	<b>Operating Systems</b>
256MB parallel NOR Flash	Linux
4MB MRAM	<b>Power Supply</b>
512KB SRAM via SPI	5V through Board to Board connector
<b>On SOM Features</b>	<b>Temperature Support</b>
10/100/1000 Ethernet PHY	-40°C to +85°C (Industrial grade operation)
Temperature Sensor	<b>Form Factor</b>
TPM2.0 Module via SPI	75mm x 110mm
	<b>Environmental Specifications</b>
	REACH & RoHS3

## Kintex Ultrascale+ FPGA SOM Block Diagram

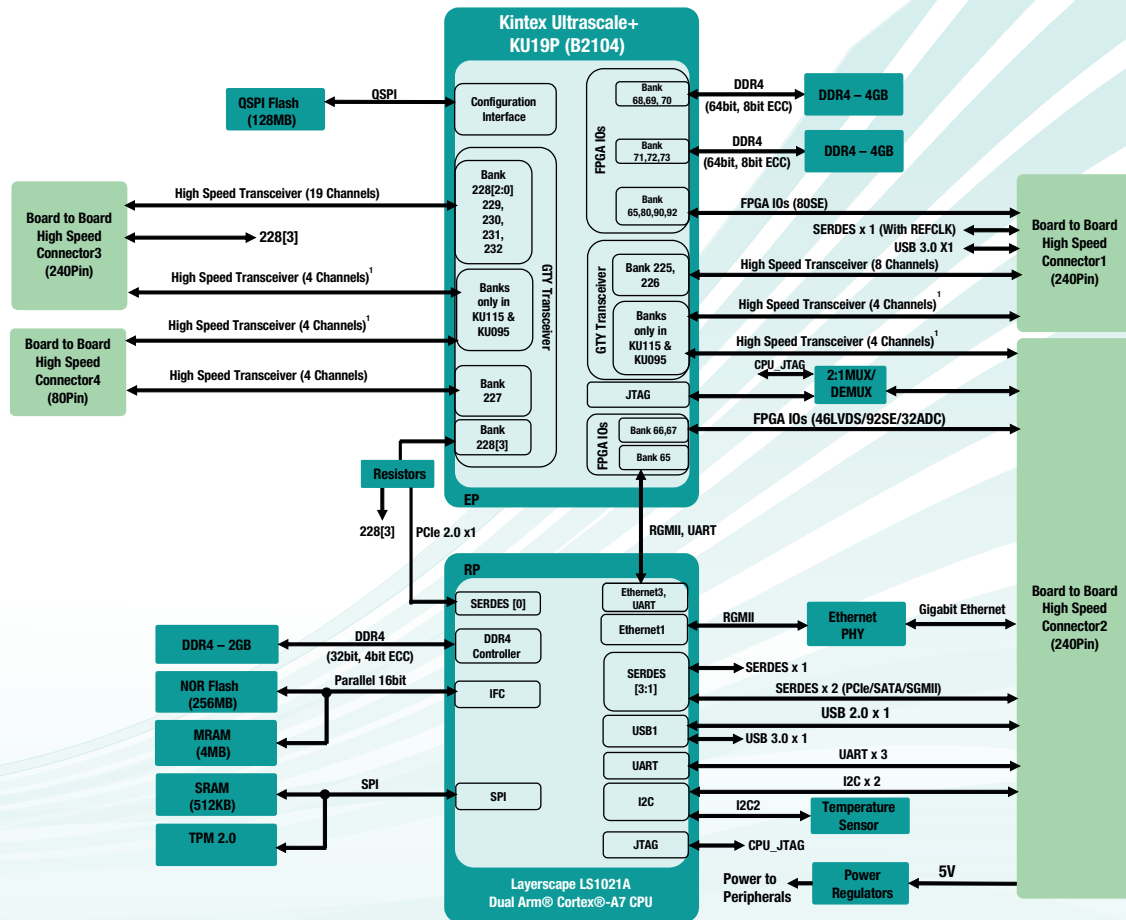

### Compatible FPGAs:

KU19P Kintex Ultrascale+ FPGA and KU115 & KU095 Kintex Ultrascale FPGAs. Also compatible with VU13P, VU11P, VU09P, VU7P, VU5P, VU190, VU160, VU125, VU080 & VU095. Bank Numbers mentioned in the block diagram is as per KU19P Bank Number & Performance may vary for other compatible FPGAs.

### Notes

<sup>1</sup> These Transceiver Banks are not available in KU19P and available only in KU115 & KU095.

<sup>2</sup> Transceiver speed is limited to 16Gbps for Transceivers in Board to Board connector1 & 2 because of connector speed limit.

## OS SUPPORT

Linux

## DELIVERABLES

Kintex UltraScale + FPGA Module  
Board Support Package  
Example FPGA Design  
User Manuals

## OPTIONAL KITS/Modules

Kintex UltraScale+ Development Kit  
Heat Spreader

## CUSTOM DEVELOPMENT

BSP Development/OS Porting  
Custom SOM/Carrier Development  
Custom Application/GUI Development  
Design Review and Support

iWave Systems Technologies is an ISO 9001:2015 certified company, head quartered in Bangalore India established in the year 1999. The company focuses on providing embedded solution and services for Industrial, Medical, Automotive and various other Embedded Computing applications. iWave Systems offers wide range of System On Modules and Single Board Computers built using wide range of CPU and FPGA SoC platforms with different form factors such as Qseven, SMARC, SODIMM and HPC by closely working with Tier-1 silicon companies such as NXP, Xilinx, Intel etc.

iWave Systems offers various state of art ready ODM solutions such as Connected Telematic Control Unit / OBD II devices for the automotive edge analytics, Comprehensive ARINC818 solutions for the low latency Aerospace applications and Rugged IP rated performance scalable HMI solutions for Industrial applications.

iWave Systems also provides comprehensive Engineering design services involving Embedded Hardware, FPGA and Software development. iWave offers carrier board and custom hardware development with manufacturing and certification services. iWave's Hardware expertise spans complex board design up to 30 layers; Analog, Digital & RF Designs; FPGA Development up to 3+ million gates and VHDL / Verilog RTL Development & Verification. Our Software expertise ranges from OS Porting, Firmware & Device Drivers Development and Wireless & Protocol

\*Optional items not included in the standard deliverables.

Note: iWave reserves the right to change these specifications without notice as part of iWave's continuous effort to meet the best in breed specification. The registered trademarks are proprietary of their respective owners.

## Kintex Ultrascale+ FPGA SOM

The device can be ordered online from the iWave Website

<https://www.iwavesystems.com/product/ku19p-fpga-system-on-module/>

Or from our Local Partners in your region

<http://www.iwavesystems.com/about-us/business-partner.html>

## INDIA

iWave Systems Technologies Pvt Ltd.  
#7/B, 29th Main, BTM Layout  
2nd Stage,  
Bangalore - 560 076  
mktg@iwavesystems.com

## JAPAN

iWave Japan Inc.  
8F Kannai Sumiyoshi Building,  
3-29 Sumiyoshi-cho, Naka -ku,  
Yokohama Kanagawa, Japan  
mktg@iwavesystems.com

## EUROPE

International Sales & Marketing Europe  
Venkelbaan 55 2908KE Capelle  
aan den IJssel,  
The Netherlands  
info@iwavesystems.eu

## USA

iWave USA  
1692 Westmont Ave. Campbell  
Ca95008  
USA  
info@iwavesystems.us